


MASONRY INFILL AT NEW WINDOW


SCALE: 3/4" = 1'-0"

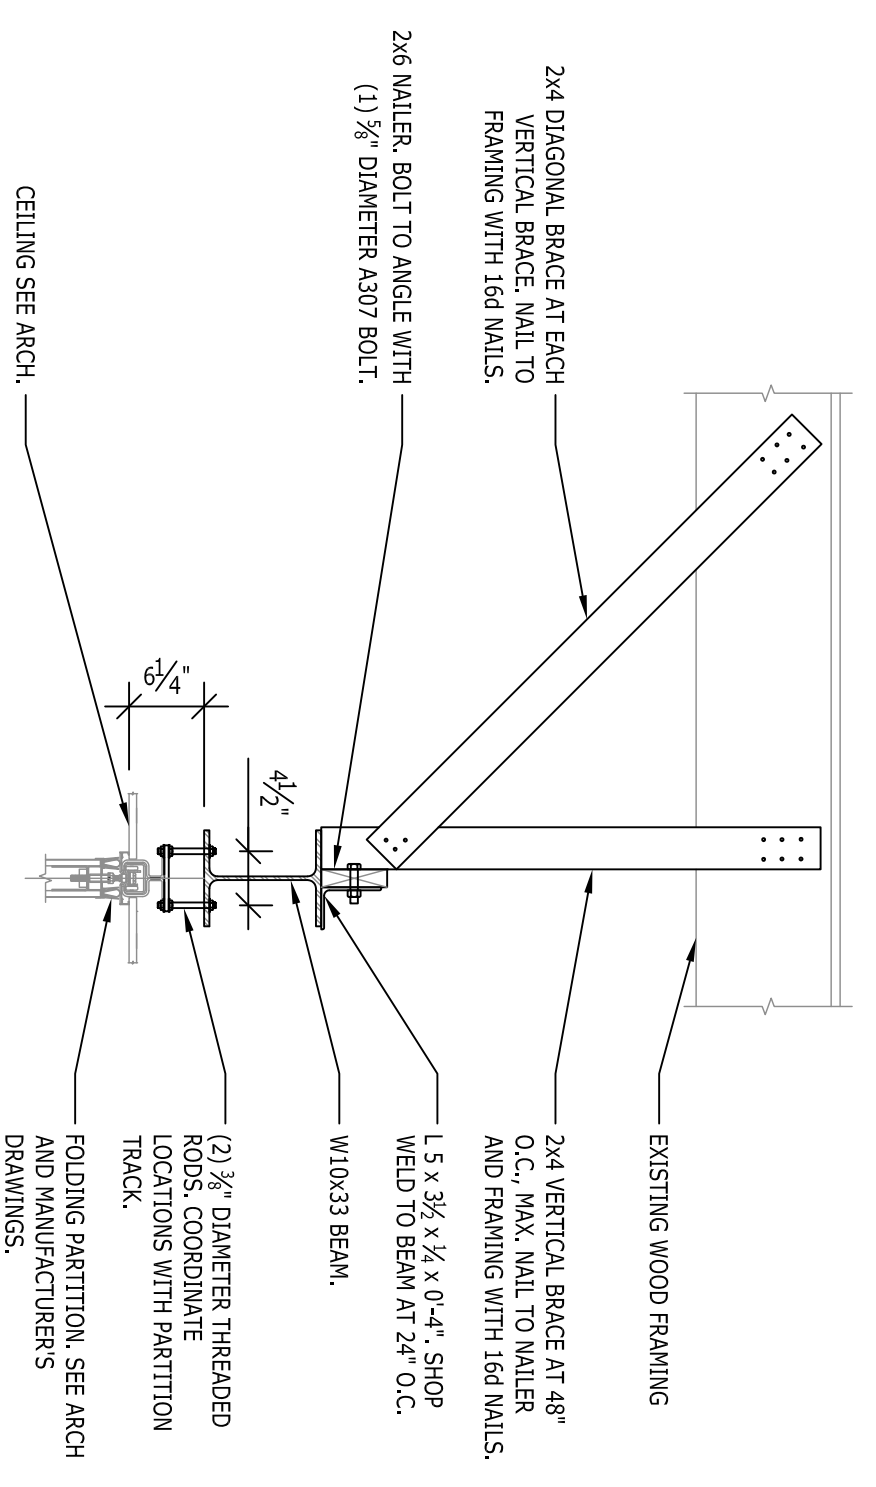

SUPPORT BEAM FOR FOLDING PARTITION


SCALE: 3/4" = 1'-0"

- GENERAL NOTES:
1. WIDE FLANGE SHAPES SHALL CONFORM WITH ASTM A992. HSS SHAPES SHALL CONFORM TO ASTM A500, GRADE B, 7/8" x 46 KSI. ANGLES AND PLATE SHALL CONFORM TO ASTM A36.
 2. WELDING ELECTRODES SHALL CONFORM TO E70xx.
 3. PROVIDE ASTM A325 BOLTS SNUG TIGHT FOR STEEL TO STEEL CONNECTIONS AND ASTM A307 BOLTS FOR WOOD TO STEEL CONNECTIONS.
 4. ANCHOR RODS SHALL CONFORM TO ASTM F1554, GRADE 36.
 5. THREADED RODS SHALL CONFORM TO ASTM A36.
 6. REINFORCE 3000 PSI CONCRETE AND ASTM A615, GRADE 60 REINFORCING STEEL.
 7. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ANY TEMPORARY SHORING OR SUPPORTS REQUIRED TO MAINTAIN STRUCTURAL STABILITY DURING CONSTRUCTION.
 8. ALL DIMENSIONS RELATING TO EXISTING CONDITIONS, INCLUDING WALL THICKNESS, SHALL BE FIELD VERIFIED PRIOR TO FABRICATION OF MATERIALS.

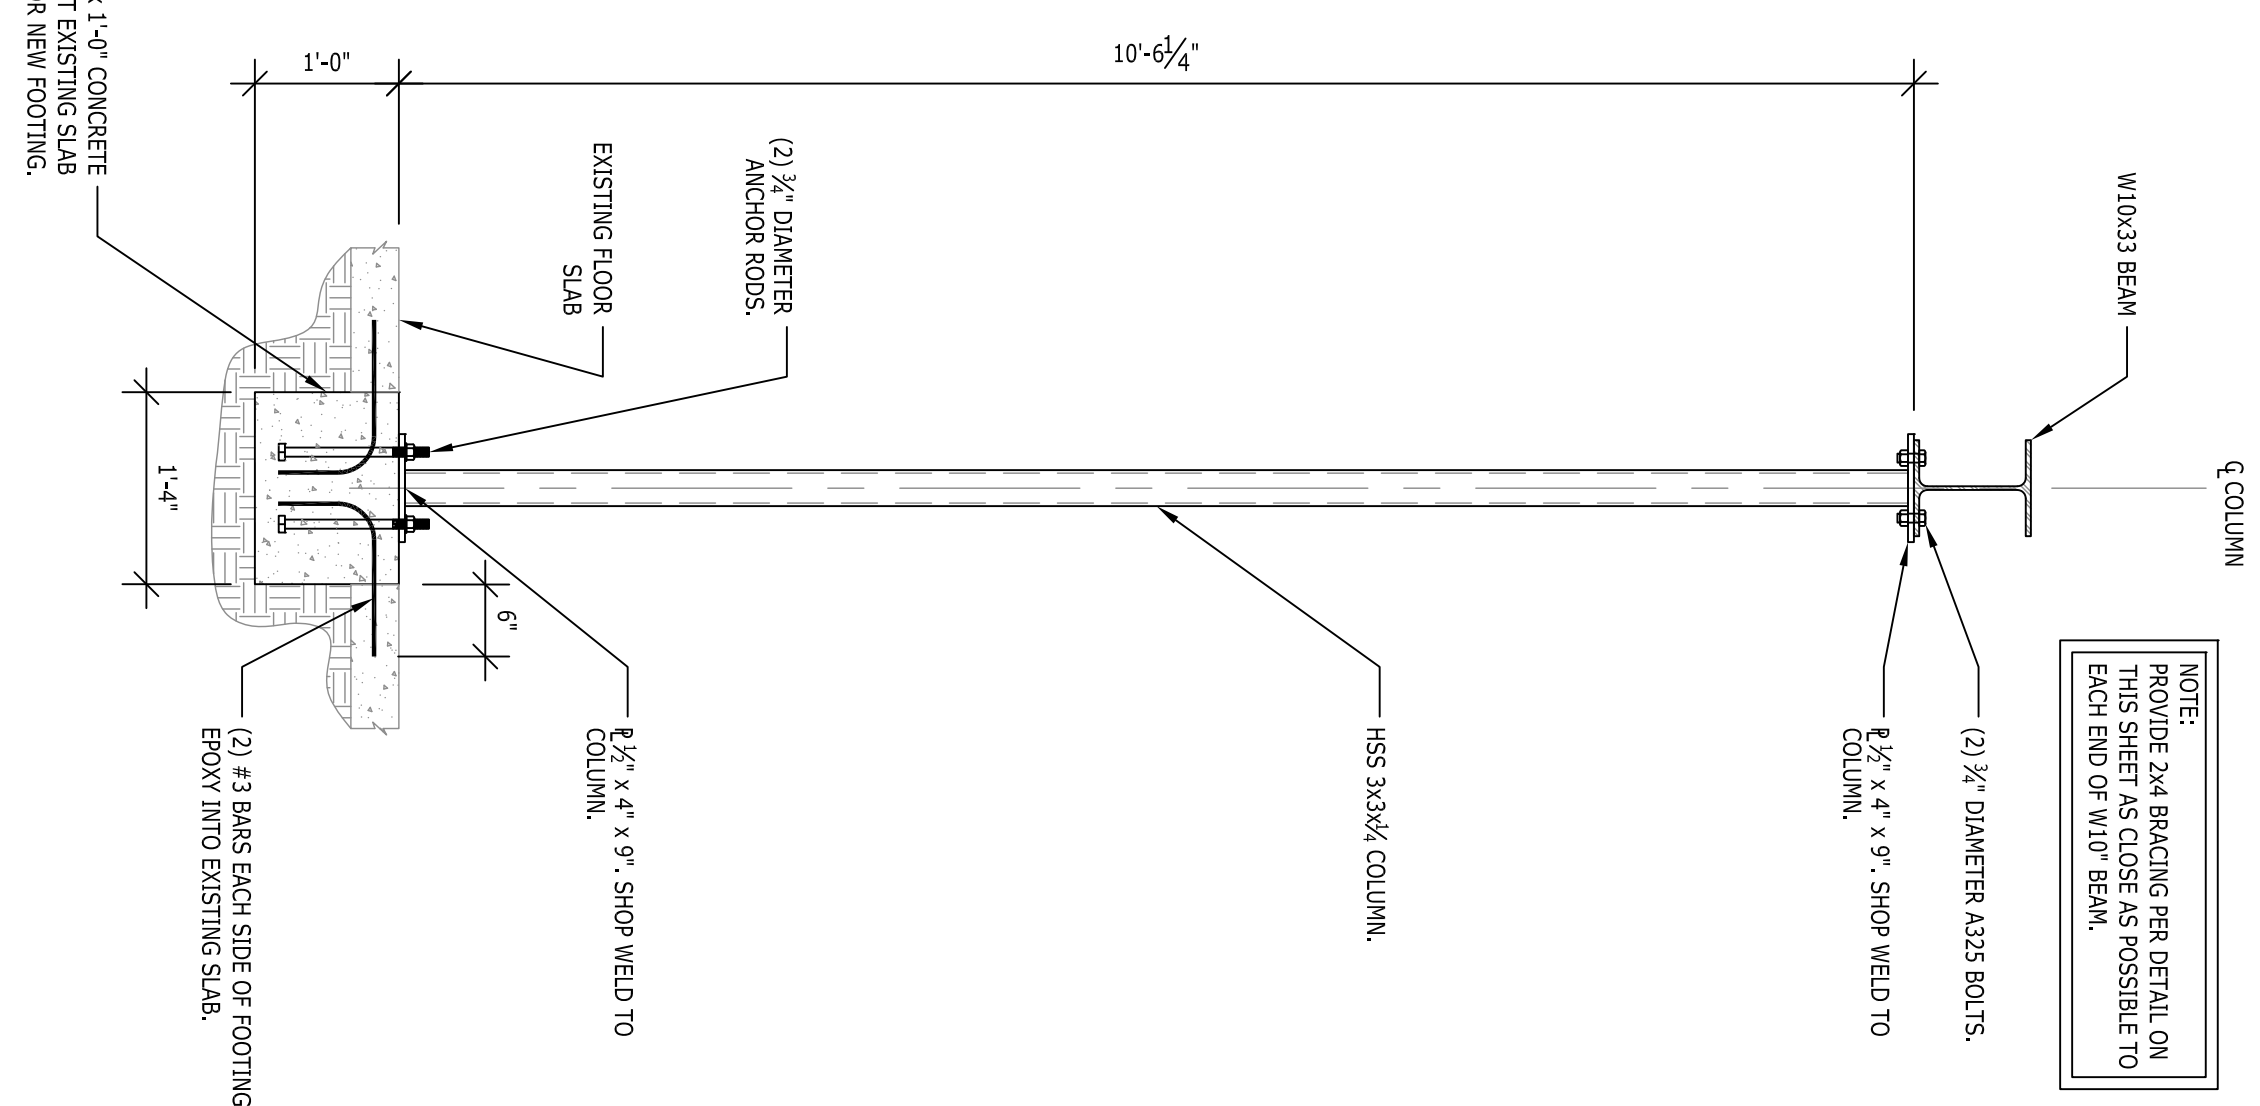

SUPPORT FOR FOLDING PARTITION BEAM

SCALE: 3/4" = 1'-0"

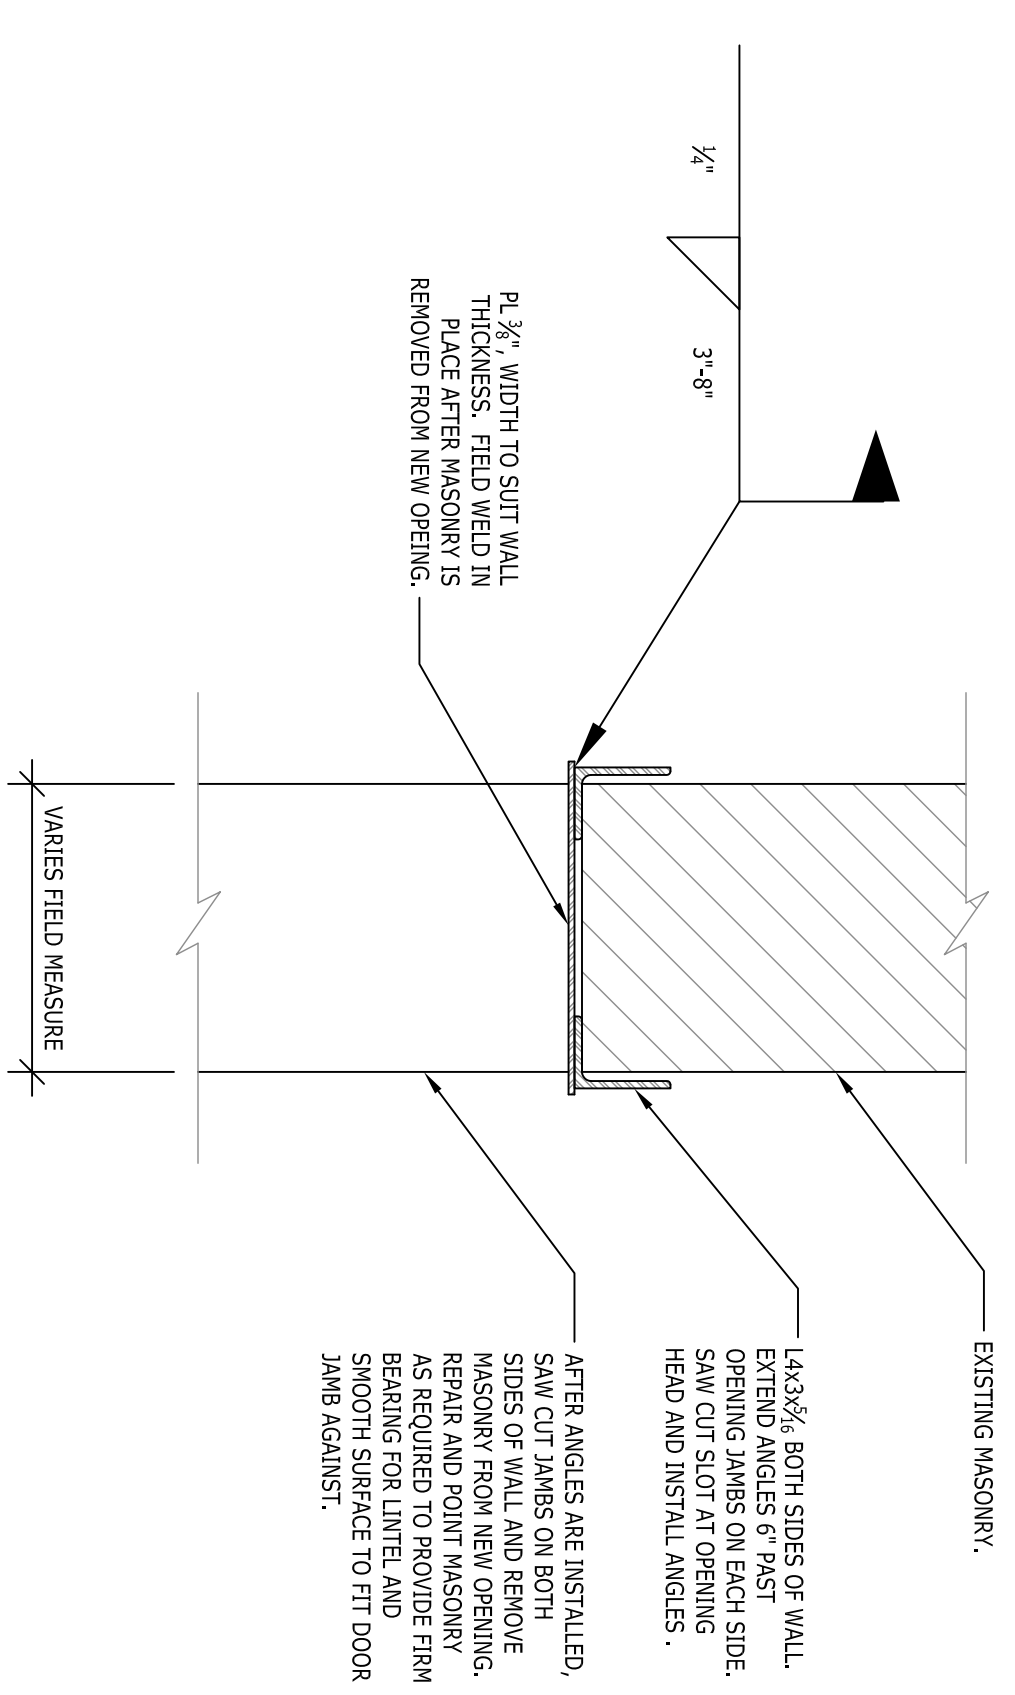

LINTEL FOR OPENING IN EXISTING BRICK MASONRY

SCALE: 1/2" = 1'-0"

NEW 1'-4" x 1'-4" x 1'-0" CONCRETE FOOTING, SAWCUT EXISTING SLAB AND REMOVE FOR NEW FOOTING.

NORTH COMMUNITY CHALLENGE CENTER
 4583 SAVANNAH HIGHWAY NORTH
 ORANGEBURG, SOUTH CAROLINA

SEAL

REVISIONS:

JOB NUMBER: 15-244

DATE: 08/14/2015

DESIGNED BY: R.A.S.

DRAWN BY: R.A.S.

CHECKED BY: R.A.S.

Scale: VARIES

SHEET No.: **S1.0**

1 of 1